



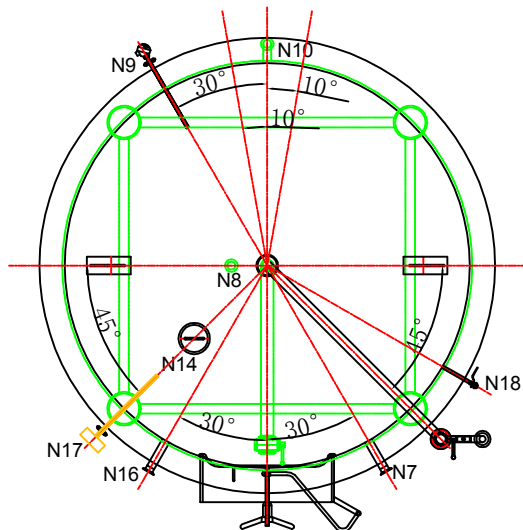

# 30BBL

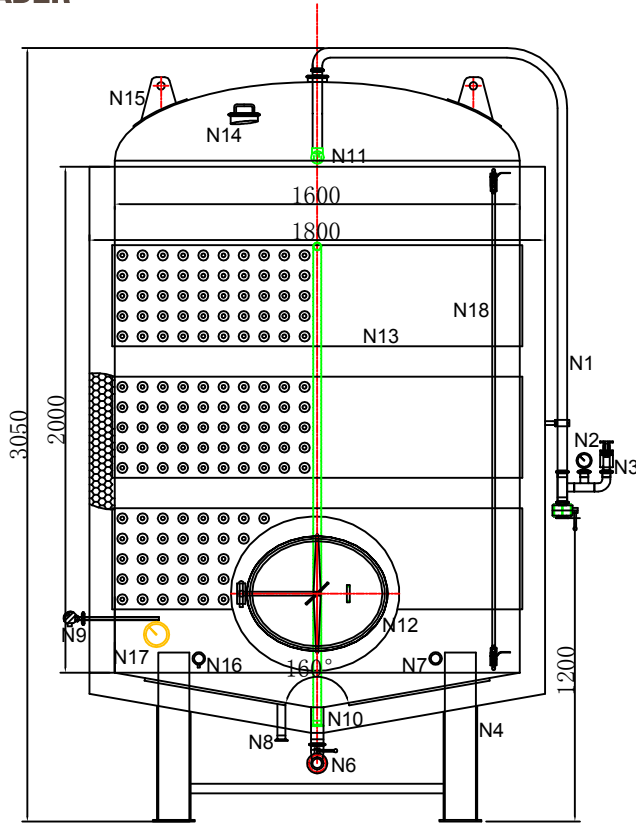

## Technique parameter

	Interior	Jacket
Material	SUS304	SUS304
Working pressure Mpa	0.15	0.2
Design pressure Mpa	0.3	0.4
Tank Size mm	∅1800*3050	
Quantity(Nos)	1	
Cooling mode	Alcohol water cooling	
Insulation material	Polyurethane	
Insulation thickness mm	100	
Outer tank thickness mm	2.0	
Inter tank thickness mm	3.0	
Cover thickness mm	3.0	
Cone angle	160°	
Cylinder volume BBL	34.35	
Cover volume BBL	3.89	
Effective volume BBL	30	
Total volume BBL	38.24	

## Welding process requirement

		Standard
Welding wire material	316-SUS	GB/T983, YB/T5091/2
Welding requirements	Both sides welding	JB/T4709-2000

## Specification

N18			Level gauge
N17	∅10mm	Clamp	Thermometer
N16	∅25mm	Clamp	Sampling valve
N15			Hoisting ring
N14	∅108mm	Clamp	Dry hops adding port
N13		Welding	Ice water jacket
N12	∅530*430mm	Quick-open	Manhole door
N11	∅38mm	Clamp	Cleaning ball
N10	∅32mm	Clamp	Ice water outlet
N9	∅10mm	Clamp	Temperature probe
N8	∅32mm	Clamp	Ice water inlet
N7	∅38mm	Clamp	Carbonation port
N6	∅38mm	Clamp	Drainage valve
N5			
N4	∅133mm	Welding	Supporting leg
N3	∅38mm	Clamp	Pressure relief valve
N2	∅38mm	Clamp	Pressure gauge
N1	∅38mm	Clamp	CIP pipe
Icon	Size	Connecting style	Name